


# INFORMATION ON UNDER-MACHINE FLOORING LINE 800 AND SYSTEM TSC

The combined system is used when it is not possible to utilize modules that are all the same


**TO ASK FOR A  
QUOTATION PLEASE  
SEND:**

- 1) MACHINE FOOTPRINT;
- 2) DISTANCE OF FEET FROM OUTER EDGE OF BASE;
- 3) SIZE OF FEET AND THEIR DISTANCE APART;
- 4) N.B. SPECIFY THE AREA OUTSIDE THE MACHINE PERIMETER WHERE THE FLOORING WITH PLATFORM WILL BE PLACED (FOR FLOORING AREA).


**EXAMPLE 1**

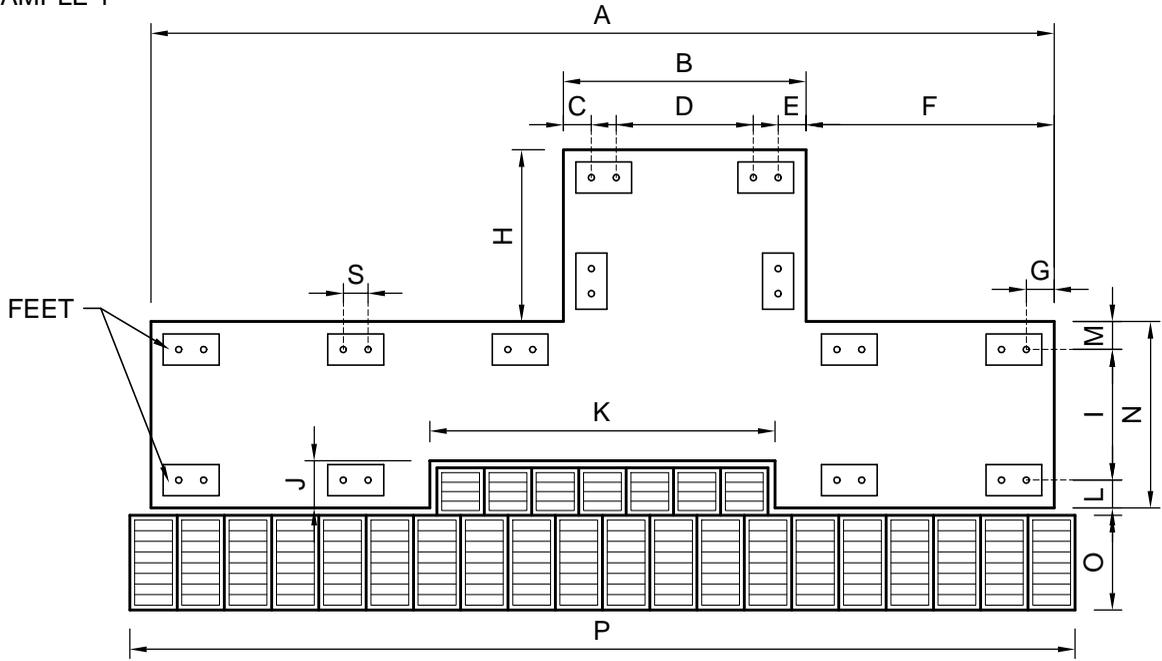


**EXAMPLE 2**

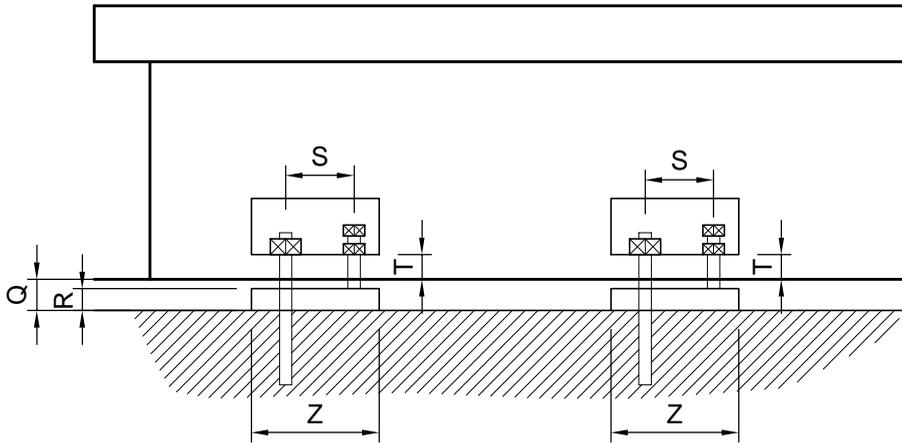

**FEET**



**EXAMPLE 3**

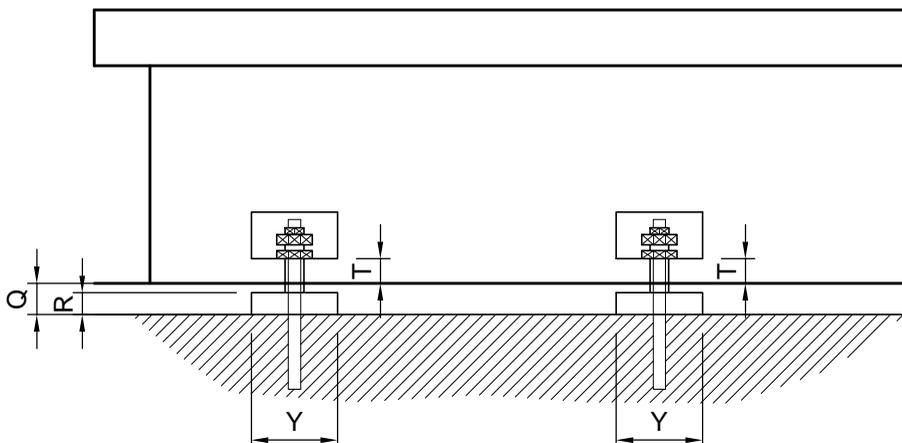

**FEET**

